

Rectifier Power Core 6 kVA 1ph MB

The Rectifier power core combines both AC and DC feed into one common unit. Simultaneously it provides AC backup power for 230 V_{AC} or 115 V_{AC} loads, and 48 V_{DC} power for DC loads and battery charging.

The total output power for both AC and DC output is limited to max 8 kW. AC and DC output limits can be set according to the attached load, where the limitation for AC load is set to max 6 kVA and for DC load to max 4,8 kW



Rectifier Power Core 6 kVA 1ph MB

Up to 6 kVA AC & up to 4,8 kW 48 VDC output

Doc CIOR0405.DS3 – rev2

MODULAR ARCHITECTURE

RECTIFIER MODULE

The 3 port converter simultaneously provides power for AC and DC loads. During mains outage the Rectifier 48/1200 HE feeds AC loads using energy stored in the battery.

The modular architecture, industry-leading efficiency, compact size, innovative design and comprehensive monitoring and control features provide significant benefits over the current industry standard.



Rectifier Module

APPLICATIONS

POWER UTILITIES

- Low & High voltage switchgear
- Transformer & SUB stations
- Power Generation & Distribution
- Control & protection
- SCADA system

OFFSHORE AND PROCESS INDUSTRY

- Safety and Automation Systems (SAS)

MARINE

- Communication onboard ships

RAILWAY & METRO INFRASTRUCTURE

- Control & protection
- Signaling

TELECOM-MOBILE/WIRELESS

- LTE/4G/WiMAX
- Distributed antenna system
- Broadband

KEY FEATURES


- 230 OR 115 VAC INPUT/OUTPUT
- SINGLE PHASE INPUT/OUTPUT
- 48 VDC INPUT/OUTPUT
- 8 KW TOTAL AC + DC OUTPUT
- MAX 6 KVA AC OUTPUT
- MAX 4,8 KW DC OUTPUT
- 1 POLE AC DISTRIBUTION OPTION
- 2 POLE AC DISTRIBUTION OPTION
- BUILT IN MANUAL BYPASS SWITCH
- BUILT IN TRANSFER TECHNOLOGY
- 150% OVERLOAD CAPABILITY, 15S
- 600% QUICK TRIP CURRENT, 20MS
- HOT PLUGGABLE
- SMARTPACK 2 CONTROLLER
- CAN OPERATE IN PARALELL WITH FLATPACK2 RECTIFIERS
- GLOBAL COMPLIANCE
- PATENTED HE TECHNOLOGY

Rectifier Power Core 6kVA 1ph MB ELTEK

A Delta Group Company

Doc CIOR0405.DS3 – rev2

TOP VIEW WITH OPTIONAL 1 POLE DISTRIBUTION

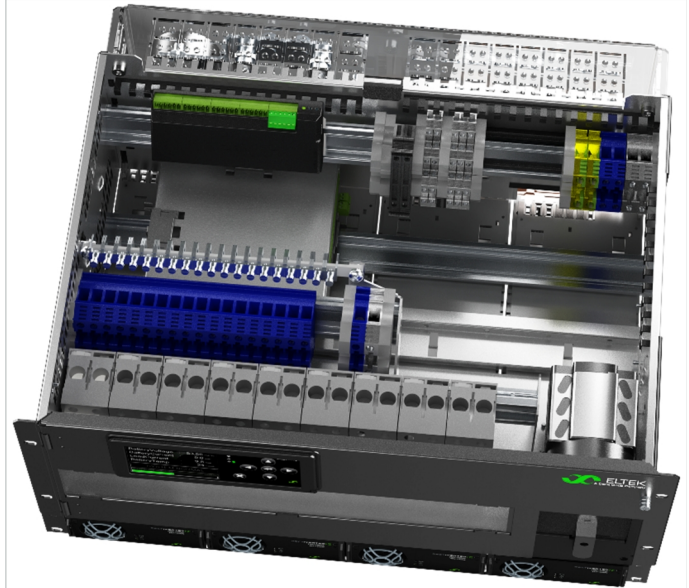


Rectifier 6 kVA single phase power core

MODEL	8 kW / 4 kW
Product family	CIOR0405.1xxx
INPUT DATA	
Voltage range AC	185-275 / 95-140 V
Voltage range DC	40-58 V
Maximum current AC	28-48 A
Frequency	47-53/57-63 Hz
Power factor	> 0.99
OUTPUT DATA	
Adjustable range AC	200-240 / 100-127 V
Adjustable range DC	43-58 V
Max output power AC	6,0 / 3,0 kVA
Max output power DC	4,8 / 2,4 kW
Power factor	0,8
Frequency	50Hz, 60 Hz
OTHER SPECIFICATIONS	
Manual bypass switch	63 A
LVBD (option)	350 A
1 pole AC distribution (option)	1-18 pc, 2-10 A, C

Specifications are subject to change without notice

SINGLE LINE WITH OPTIONAL 1 POLE DISTRIBUTION

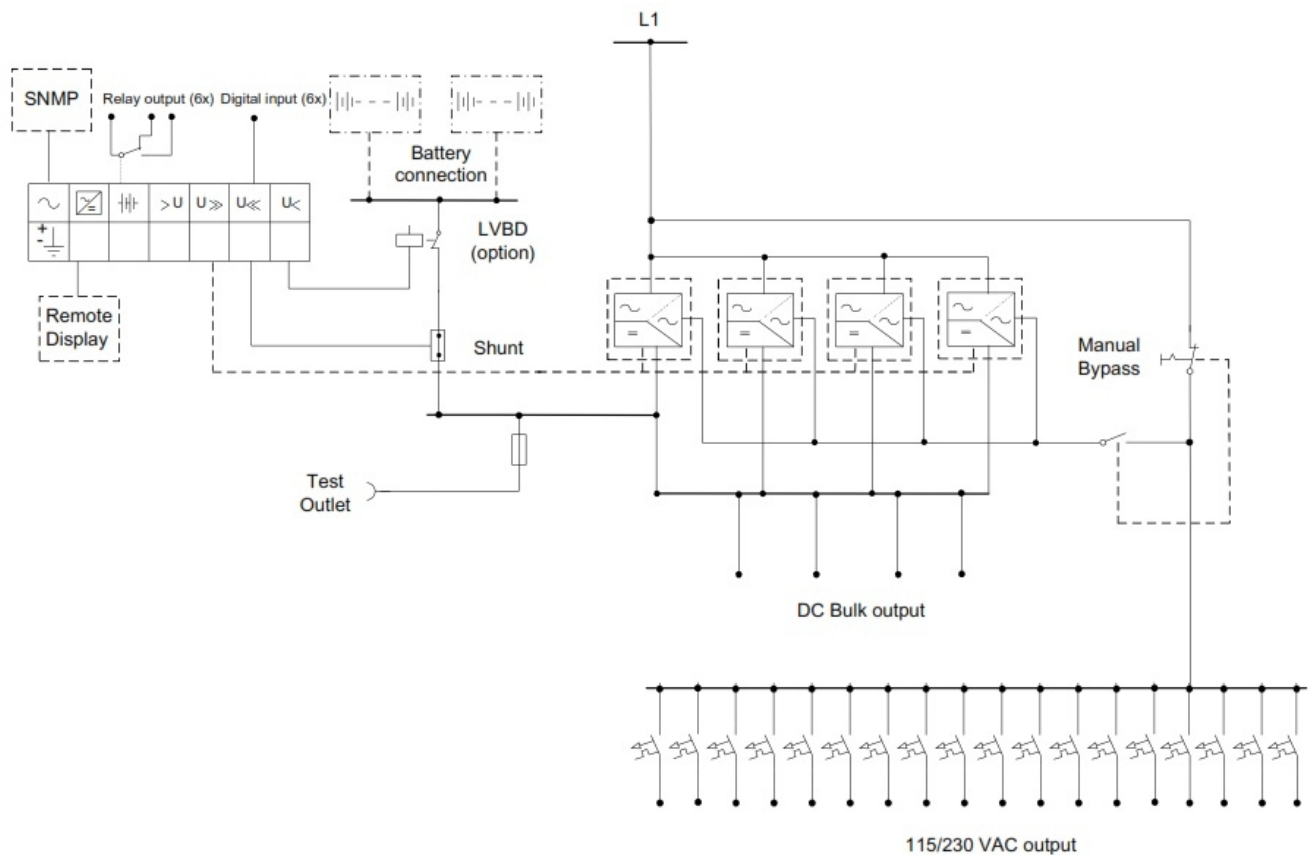

Rectifier Power Core 6kVA 1ph MB ELTEK


A Delta Group Company

Doc CIOR0405.DS3 – rev2

MODEL	8 / 4 KW
Product family	CIOR0405.1xxx
INPUT DATA	
Voltage range AC	185-275 / 95-140 V
Voltage range DC	40-58 V
Maximum current AC	28-48 A
Frequency	47-53/57-63 Hz
Power factor	> 0.99
OUTPUT DATA	
Adjustable range AC	200-240 / 100-127 V
Adjustable range DC	43-58 V
Max output power AC	6,0 / 3,0 kVA
Max output power DC	4,8 / 2,4 kW
Power factor	0,8
Frequency	50Hz, 60 Hz
OTHER SPECIFICATIONS	
Manual bypass switch	63 A
LVBD (option)	350 A
2 pole AC distribution (option)	1-9 pc, 2-10 A, C


Specifications are subject to change without notice

TOP VIEW WITH OPTIONAL 2 POLE DISTRIBUTION

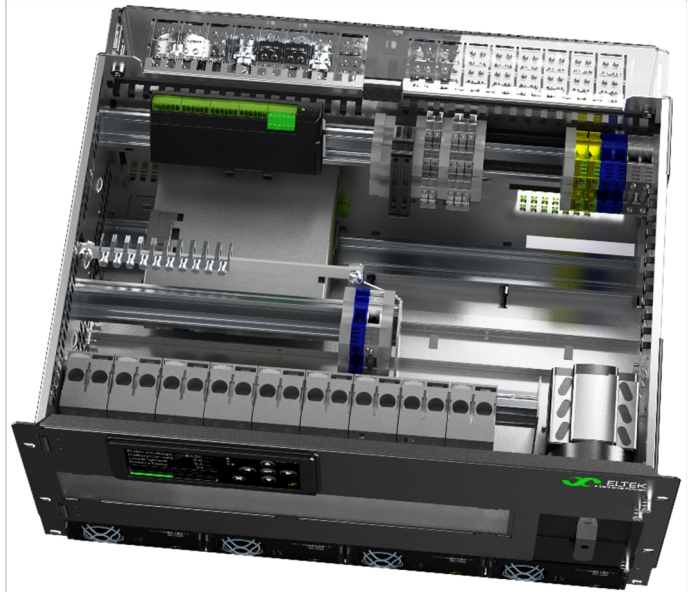

Rectifier 6 kVA single phase power core

SINGLE LINE WITH OPTIONAL 2 POLE DISTRIBUTION

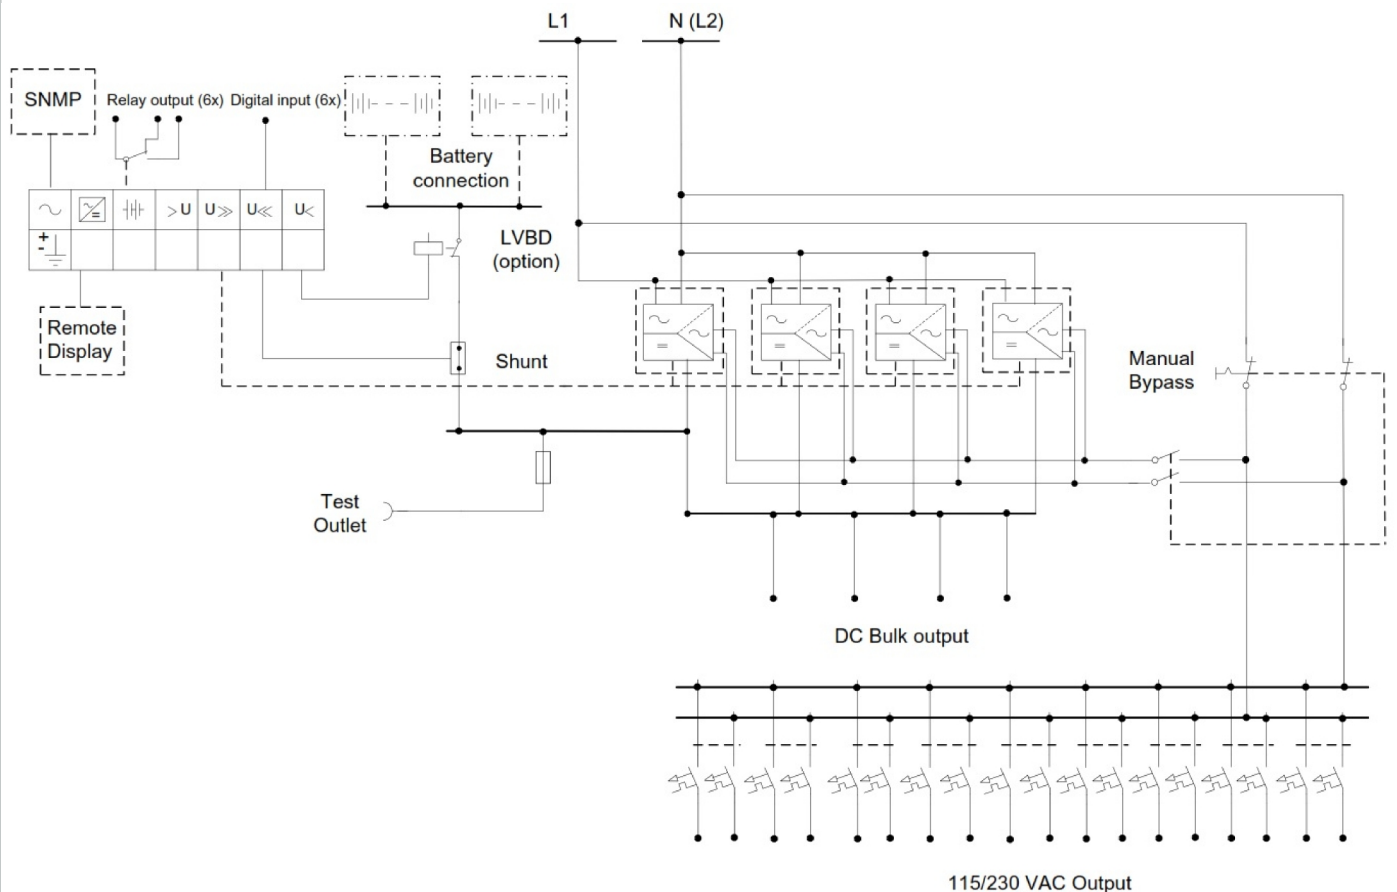

Rectifier Power Core 6kVA 1ph MB

Doc CIOR0405.DS3 – rev2

Models / ordering information		8 kW, 230 V	4 kW, 115 V
Product family		CIOR0405.1xxx	CIOR0405.1xxx
AC OUTPUT DATA			
Voltage (default) / (adjustable range) ¹⁾		230 V _{AC} / 200 - 240 V _{AC}	115 V _{AC} / 100 - 127 V _{AC}
Frequency (default inverter mode)		50 Hz (adaptive)	60 Hz (adaptive)
Frequency (set-able inverter mode)		50Hz, 60Hz or last synced 50/60Hz (adaptive)	
Power maximum (continuous / overload (<15s))		4800 W (6000 VA) / 8000 VA	2400 W (3000VA) / 4000 VA
Current maximum (continuous / overload (<15s))		26A _{RMS} / 34,8A _{RMS}	
Current (maximum) Quick trip (20ms)		120A (6 x nominal)	
Hold up (Voltage dips) (before switching to battery)		> 5 ms @ 4800W load	> 5 ms @ 2400W load
THD		< 1.5 % at resistive load	
Output features		Fuse in L and N, Hot pluggable	
DC OUTPUT DATA			
Voltage (default) / (adjustable range)		53.5 V _{DC} / 43 - 58 V _{DC}	
Power (maximum @nominal input)		4800 W ²⁾	2400 W ²⁾
Current (maximum @V _{OUT} ≤ 48 V _{DC})		100 A ²⁾	50 A ²⁾
Hold up time, maximum output power		>10ms; V _{OUT} > 41 V _{DC}	
Output features		Short circuit proof, Over voltage Shutdown, Bulk DC output connection to M8 bolt	
INPUT DATA			
AC Mains Input Voltage (single phase)		185 - 275 V _{AC} ,	95 - 140 V _{AC}
AC Current (at nominal output voltage) (depending on module type)		28-48 A _{RMS} ⁴⁾	
Frequency (default: sync range)		47-53 & 57-63 Hz	57-63 & 47-53 Hz
Frequency (set-able: sync range)		47-53 Hz, 57-63 Hz or both (adaptive)	
Power Factor / THD		> 0.99 at 50% load or more / < 3.5%	
DC Voltage nominal / extended range (no overload) ³⁾		45 - 58 V _{DC} / 40 - 45 V _{DC}	
DC Current (maximum)		128 A / 180A during overload (15s)	64 A / 90A during overload (15s)
Input features		Fuse in L and N, Hot pluggable, Varistor, Hot pluggable AC input individual screw terminals 10 mm2 for L, N & PE Bulk DC input connection to M8 bolt Bulk DC battery connection to M8 bolt	
OPTIONS			
Control and monitoring (see Smartpack2 datasheet)		Smartpack2, including industrial basic & I/O monitor type 2	
LVBD		350 A	
1 pole AC distribution (connection directly on MCB)		1-18 pc, 2-10A, C characteristics	
2 pole AC distribution (connection directly on MCB)		1-9pc, 2-10A, C characteristics	
OTHER SPECIFICATION			
Efficiency		>96% (mains mode (AC/AC and AC/DC)), >94% (inverter mode (DC/AC))	
Manual bypass switch		63 A (make before break)	
Protection Class		IP 20	
Operating temperature		-40 to +55°C (-40 to +131°F), humidity 5 - 95% RH non-condensing	
Storage temperature		-40 to +85°C (-40 to +185°F), humidity 0 - 99% RH non-condensing	
Dimensions[WxDxH] / Weight		482 x 432 x 222mm (5U) (19 x 17 x 8,8") / 16kg (35 lbs)	
DESIGN STANDARDS			
Electrical safety		EN 60950-1, EN 62040-1	
EMC		ETSI EN 300 386 V.1.6.1, FCC CFR 47 Part 15 EN 61000-6-1 /-2/-3/-4	
Environment		ETSI EN 300 019: 2-1 (Class 1.2), 2-2 (Class 2.3) & 2-3 (Class 3.2) RoHS (2011/65/EU) and WEEE (2002/96/EC) compliant	

1) Output voltage ranges configured in factory and have individual keying in top chassis
3) 40 - 45 V_{DC}: reduced performance - no power boost and increased voltage THD on AC output.

2) AC load has priority. Maximum available DC output power and current is dependent on instant AC load and AC input voltage; i.e maximum 3200W/65 A at full AC power and nominal input for 230V_{AC}.
4) If DC voltage is pulled below 43V the input current may increase above this level

1) Output voltage ranges configured in factory and have individual keying in top chassis

3) 40 - 45 V_{DC}: reduced performance - no power boost and increased voltage THD on AC output.

2) AC load has priority. Maximum available DC output power and current is dependent on instant AC load and AC input voltage; i.e maximum 3200W/65 A at full AC power and nominal input for 230V_{AC}.

4) If DC voltage is pulled below 43V the input current may increase above this level

Specifications are subject to change without notice